



DEFORIN

18V LITHIUM-ION GREASE GUN

POWER

27 grease cartridges
per battery charge

8,000 psi (552 bar)

6.0 oz (170 g)/min

STRENGTH

Aluminum die cast
transmission case

Glass-fiber
reinforced nylon
housing for superior
strength and resistance
to impact

EASE OF USE

Easy to prime at low
temperature

Durable ultra-flexible Kevlar
reinforced hose with flashlight

Ergonomic design

Superior balance for
less physical strain

MAXIMUM POWER. ULTIMATE RUNTIME. PRODUCTIVITY.



18V LITHIUM-ION GREASE GUN



Mechanical Efficiency

- Curved slot yoke optimizes mechanical efficiency
- Piston and yoke perfectly aligned
- Motor fastened directly to housing
- Ball and needle bearings
- Aluminum die cast transmission case for optimal mechanical efficiency and durability



Comfort

- Optimized shape, weight, and balance for comfortable grip and less physical strain



Air Flow Management

- Patented air flow management maximizes motor and transmission life



Battery And Stall Indicators

- Stall light indicates clogged fitting
- Battery light indicates sufficient capacity for 3 grease cartridges

LITHIUM TECHNOLOGY

3X as many charges



No Memory Effect

The battery can be charged at any time, for any length of time, without loss of capacity




60-minute charger

monitors the battery during the charging process to enhance battery life.



5X less self-discharge



Lithium-ion battery can be stored for months without losing charge

Fade-free power

Consistent level of performance




MAXIMUM POWER. ULTIMATE RUNTIME. PRODUCTIVITY.



18V LITHIUM-ION GREASE GUN

INCLUDED

Part No.	Description
343151	18V Grease Gun Battery
343152	18V Grease Gun Charger (110V/60 Hz) (For model #595-A or #595-B)
343153	18V Grease Gun Charger (220V/50 Hz) (For model #595-C or #595-D)
343170	18V Grease Gun Flashlight with Clip

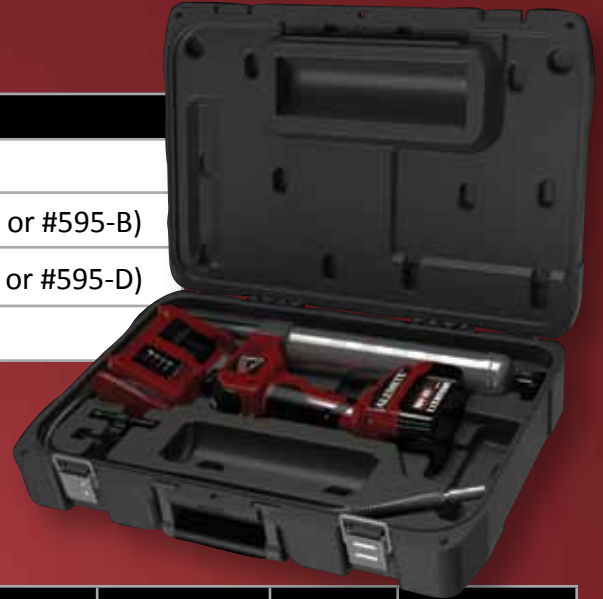

SPECIFICATIONS

Model	Charger Input	Li-ION HD Battery			Cartridges per battery charge	Pressure	Flow Rate	Hose Length	Gun Weight (empty)
		Qty	Volts	Capacity					
595-A	110 V 60 Hz	1	18 V	3000 mAh	27	8,000 psi (552 bar)	6.0 oz/min	36 in (91 cm)	7.2 lb (3.3 kg)
595-B		2							
595-C	220 V 50 Hz	1							
595-D		2							

ACCESSORIES

Carrying Strap	Grease Meter		Mobile Charger	Pressure Relief Valve
	oz	g		
339812	3530 + 340062	3530-A + 340062	343154	340338



1057 521 Corporate Center Drive
Suite 100
Fort Mill, SC 29707
Toll Free U.S.: 866-425-3648
Toll Free Canada: 800-267-8022
International: 803-802-0001
Fax U.S.: 800-648-3917
Fax Canada: 800-267-2880
Fax International: 803-802-0192
www.alemite.com

LIT182 10/11

DISTRIBUTOR INFORMATION



ul. Katowicka 18A, 41-500 Chorzów

deforin@deforin.pl
(0-32) 241-16-23
605-880-422